

6600 | 6602

HOT MELT



COLD TEMPERATURE SURFACE PRINTABLE CARTON SEALING TAPE



PRODUCT DESCRIPTION


This Easy Printable Cold Temperature packaging tape is designed for automatic carton sealing applications that require medium to heavy adhesion in low temperature environments such as meat processing plants.

PERFORMANCE FEATURES

- Adheres instantly to corrugated, paper, film and a number of surfaces
- Good edge tear and split resistance.
- Aggressive high tack adhesive with excellent holding powers

TECHNICAL SPECIFICATIONS

Color:	Clear <input type="checkbox"/> White <input type="checkbox"/>
Backing (mils/mm): BOPP	1.38 / 0.035
Adhesive:	Synthetic Rubber and Resins
Total Thickness (mils/mm):	2.01 / 0.051
Adhesion to Steel (oz/in. - N/100mm):	27 / 29
Tensile Strength (lbs/in. - N/100mm):	31 / 542
Elongation at Break:	165%
Service Temperature - Min / Max:	-15°F (-26°C) / 100°F (38°C)
Application Temperature - Min / Max:	20°F (7°C) / 110°F (43°C)
Available Widths:	144mm, 150mm
Available Lengths (machine):	914m

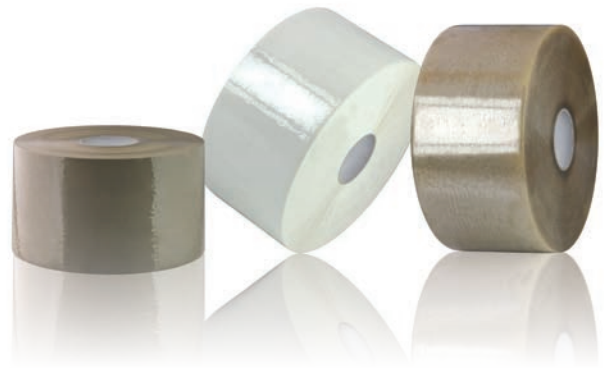

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Vibac Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.